


MODEL: MC1.3-6







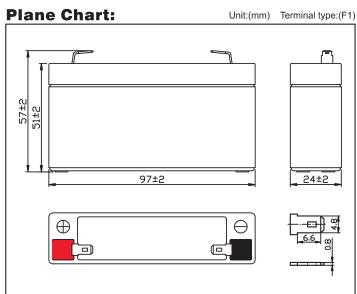



ISO9001 ISO14001 OHSAS18001






Parameter Chart:


Parameter Chart.										
Volt	S									
Capacity((25°C)	20	1.3Ah							
Discharge Current Testing (25°C)		20	32min							
		60	I ₂₀ rate (3.9	A,7min)	7min					
Internal Res	sistance	Full	82mΩ							
Capacity Affected By Temperature			40°C		104%					
			25°C		100%					
		0°C			83%					
		-15°C			65%					
Residual Capacity (25°C)		Capacity After 3 Months Storage			91%					
		Capacity After 6 Months Storage			82%					
		Capacity After 12 Months Storage			65%					
Charge (Constant	Cycle (25°C)	Initial Char Th Voltag							
Voltage)	Float (25°C)		Charge \	-6.9V						
	Weight ((Appro	x)	0.29k	0.29Kg					

[★]The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

Residual Capacity

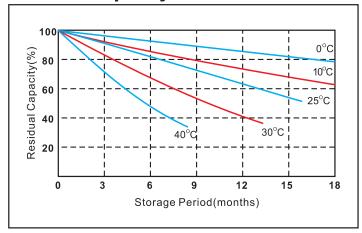


Discharge Current 25°C

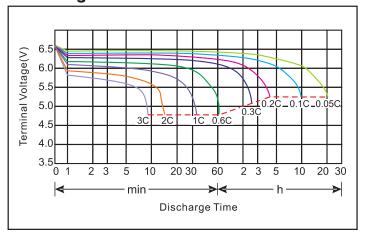




MODEL: MC1.3-6

Constant voltage charging characteristics

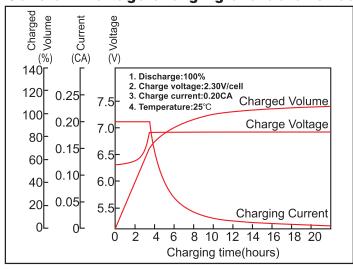

Float Life

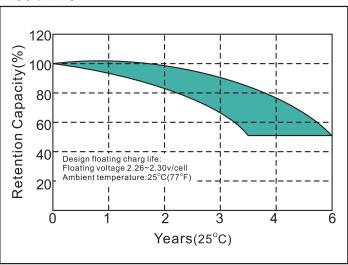

Constant Current Discharge Characteristics (A, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80V	4.53	2.81	2.11	1.25	0.78	0.43	0.32	0.21	0.14	0.12	0.066
5.10V	4.31	2.62	1.98	1.19	0.75	0.42	0.31	0.21	0.14	0.11	0.065
5.25V	4.18	2.56	1.92	1.16	0.73	0.42	0.30	0.20	0.13	0.11	0.066
5.40V	4.02	2.43	1.85	1.13	0.72	0.41	0.29	0.19	0.13	0.10	0.064

Constant Current Discharge Characteristics (Watt, 25°C)

F.V/Time	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
4.80V	24.48	15.31	11.61	7.00	4.45	2.47	1.86	1.23	0.83	0.71	0.39
5.10V	23.72	14.54	11.09	6.72	4.29	2.47	1.80	1.17	0.83	0.65	0.39
5.25V	23.18	14.34	10.85	6.61	4.22	2.46	1.76	1.12	0.77	0.65	0.39
5.40V	22.51	13.73	10.55	6.50	4.11	2.40	1.70	1.12	0.77	0.60	0.38

Capacity Factors With Different Temperature

Battery	Туре	-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
Battery	6V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%

[★]The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.